

 smart power

ACCESSORIES

# LIGHT COVERS



# TRIPODS

## ALUMINUM



## STEEL MAST



# LED BALLOON LIGHT 100W




## TECHNICAL DATA


## 100W

General	Voltage(V)	AC 100V-240V
	Frequency(Hz)	50/60
Lamp	Lamp beads	PHILIPS 3030
	Luminous Flux(Lm)	13500
	Color Rendering Index(Ra)	≥70
	Average Lamp Life(H)	50000
	Correlated Color Temperature (K)	5000
	Working Size(mm)	600*430
Tripod	Material	Aluminium alloy ■(Mirror-surface)
	Lifting System	Manual
	Section	Two
Weight	Lamp(KG)	6.3
	Tripod(KG)	7.46
	Total Weight(KG)	13.76

## DIMENSIONS

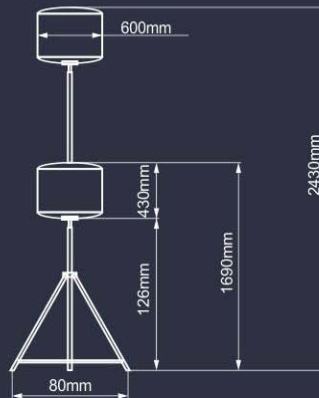

## LIGHTING DATA

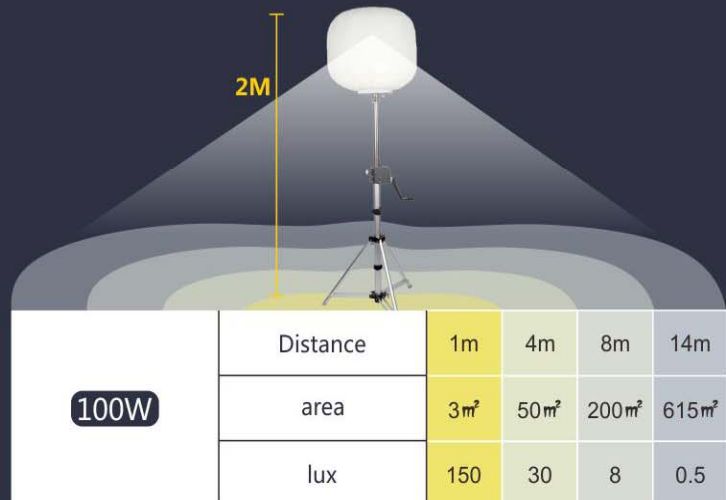


### TECHNICAL DATA


### 200W

General	Voltage(V)	AC 100V-240V
	Frequency(Hz)	50/60
Lamp	Lamp beads	PHILIPS 3030
	Luminous Flux(Lm)	27000
	Color Rendering Index(Ra)	≥70
	Average Lamp Life(H)	50000
	Correlated Color Temperature (K)	5000
	Working Size(mm)	600*430
Tripod	Material	Aluminium alloy ■(Mirror-surface)
	Lifting System	Manual
	Section	Two
Weight	Lamp(KG)	6.45
	Tripod(KG)	7.46
	Total Weight(KG)	13.91

### DIMENSIONS

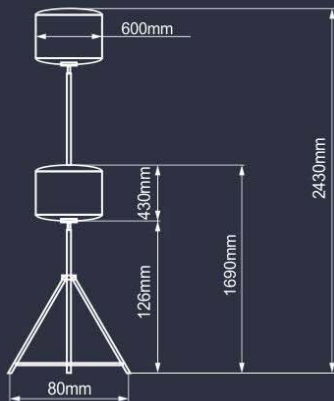

### LIGHTING DATA

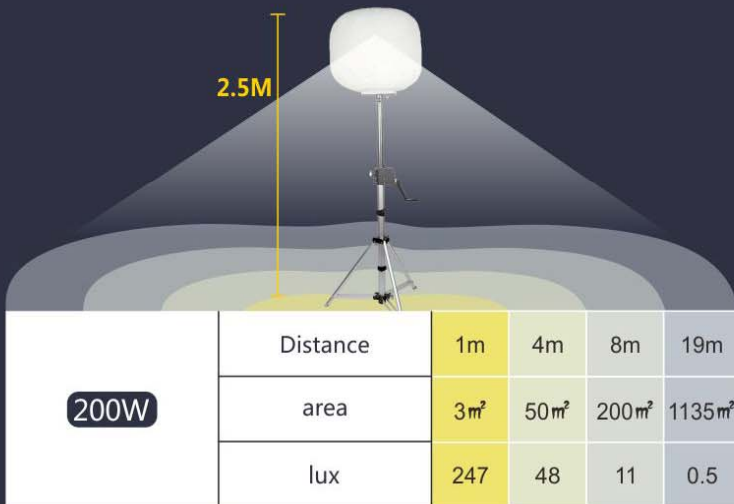



# LED BALLOON LIGHT 320W




## TECHNICAL DATA


## 320W

General	Voltage(V)	AC 100V-240V
	Frequency(Hz)	50/60
Lamp	Lamp beads	PHILIPS 3030
	Luminous Flux(Lm)	43200
	Color Rendering Index(Ra)	≥70
	Average Lamp Life(H)	50000
	Correlated Color Temperature (K)	5000
	Working Size(mm)	870*540
Tripod	Material	Aluminium alloy ■(Mirror-surface)
	Lifting System	Manual
	Section	Two
Weight	Lamp(KG)	8.23
	Tripod(KG)	9.16
	Total Weight(KG)	17.39

## DIMENSIONS

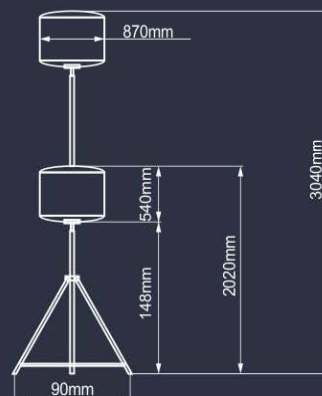

## LIGHTING DATA

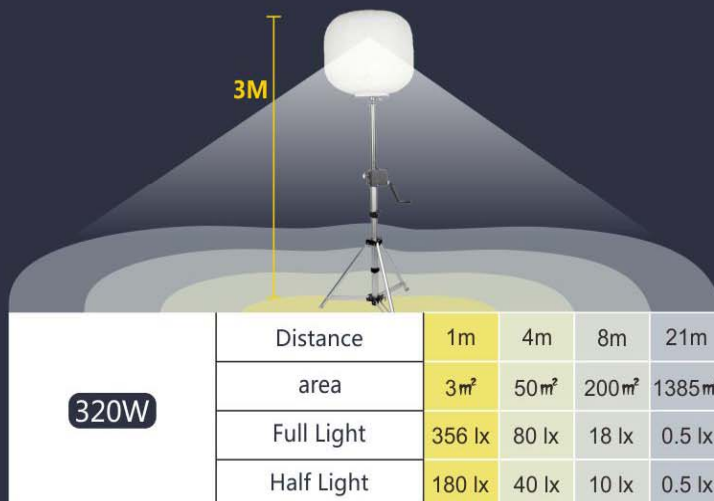


## TECHNICAL DATA


## 400W

General	Voltage(V)	AC 100V-240V
	Frequency(Hz)	50/60
Lamp	Lamp beads	PHILIPS 3030
	Luminous Flux(Lm)	54000
	Color Rendering Index(Ra)	≥70
	Average Lamp Life(H)	50000
	Correlated Color Temperature (K)	5000
	Working Size(mm)	870*540
Tripod	Material	Aluminium alloy ■(Mirror-surface)
	Lifting System	Manual
	Section	Two
Weight	Lamp(KG)	9
	Tripod(KG)	9.16
	Total Weight(KG)	18.16

## DIMENSIONS

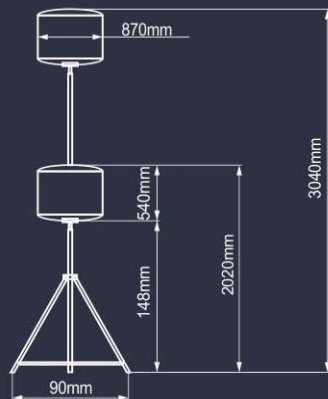

## LIGHTING DATA

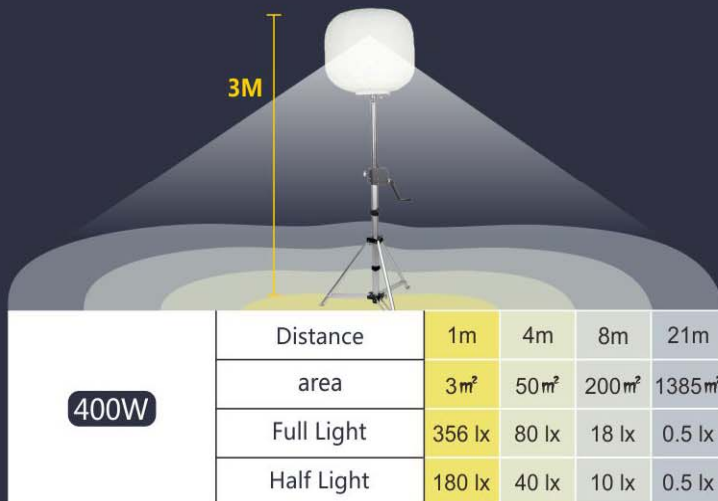

**LED BALLOON  
LIGHT 480W**




**TECHNICAL DATA**


**480W**

General	Voltage(V)	AC 100V-240V
	Frequency(Hz)	50/60
Lamp	Lamp beads	PHILIPS 3030
	Luminous Flux(Lm)	66240
	Color Rendering Index(Ra)	≥70
	Average Lamp Life(H)	50000
	Correlated Color Temperature (K)	5000
	Working Size(mm)	870*540
Tripod	Material	Aluminium alloy ■(Mirror-surface)
	Lifting System	Manual
	Section	Two
Weight	Lamp(KG)	9.5
	Tripod(KG)	10.71
	Total Weight(KG)	20.21

**DIMENSIONS**

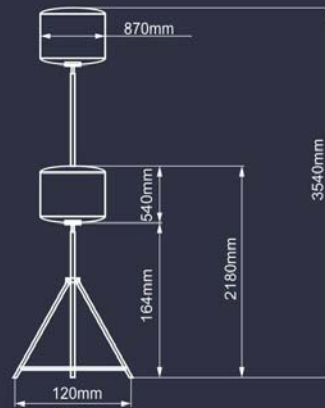

**LIGHTING DATA**

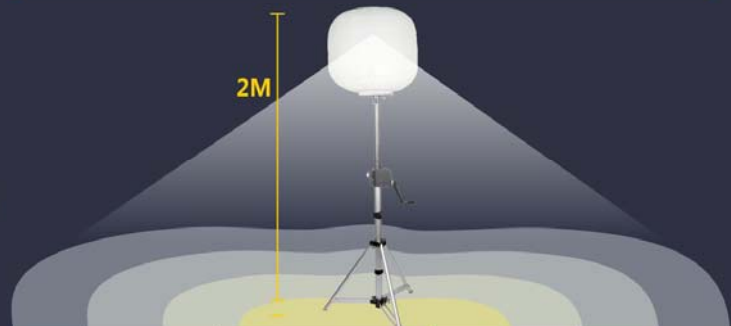

<b>480W</b>	Distance	1m	4m	8m	32m
	area	3m <sup>2</sup>	50m <sup>2</sup>	200m <sup>2</sup>	3215m <sup>2</sup>
	Full Light	175 lx	70 lx	20 lx	0.5 lx
	Half Light	85 lx	35 lx	10 lx	0.5 lx

# LED BALLOON LIGHT 600W




## TECHNICAL DATA


## 600W

General	Voltage(V)	AC 100V-240V
	Frequency(Hz)	50/60
Lamp	Lamp beads	PHILIPS 3030
	Luminous Flux(Lm)	78000
	Color Rendering Index(Ra)	≥70
	Average Lamp Life(H)	50000
	Correlated Color Temperature (K)	5000
	Working Szie(mm)	950*650
Tripod	Material	Aluminium alloy ■(Mirror-surface)
	Lifting System	Manual
	Section	Three
Weight	Lamp(KG)	12.4
	Tripod(KG)	12.06
	Total Weight(KG)	24.46

## DIMENSIONS

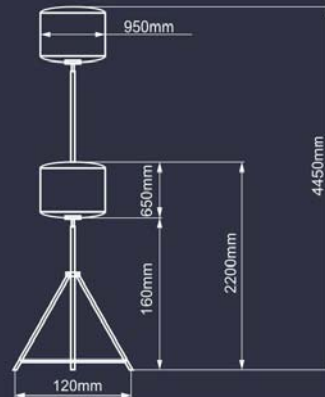

## LIGHTING DATA

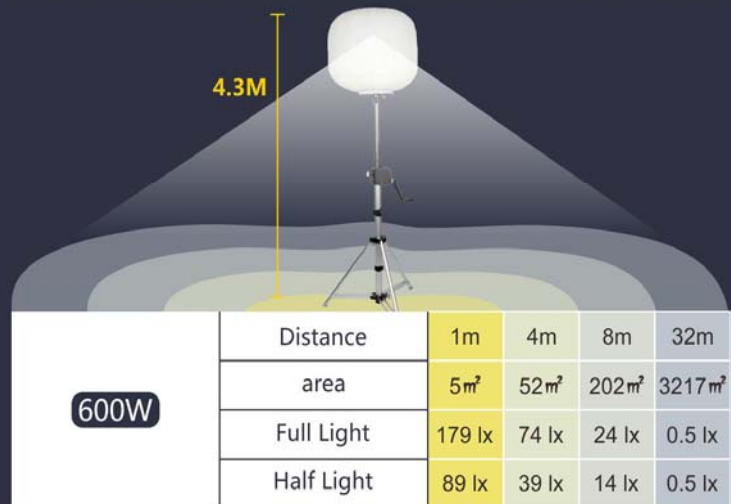




### TECHNICAL DATA

### 1000W

General	Voltage(V)	AC 100V-240V
	Frequency(Hz)	50/60
Lamp	Lamp beads	PHILIPS 3030
	Luminous Flux(Lm)	130000
	Color Rendering Index(Ra)	≥70
	Average Lamp Life(H)	50000
	Correlated Color Temperature (K)	5000
	Working Size(mm)	950*650
Tripod	Material	Aluminium alloy ■(Mirror-surface)
	Lifting System	Manual
	Section	Three
Weight	Lamp(KG)	15.1
	Tripod(KG)	12.06
	Total Weight(KG)	27.16

### DIMENSIONS

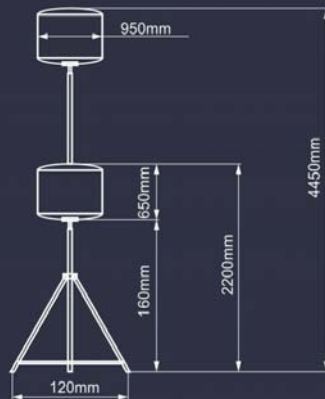

### LIGHTING DATA

